




Product Service

CERTIFICATE

No. Z2 087093 0012 Rev. 01

Holder of Certificate: **Solarclarity BV**
Hogeweyselaan 145
1382 JK Weesp
THE NETHERLANDS

Certification Mark:

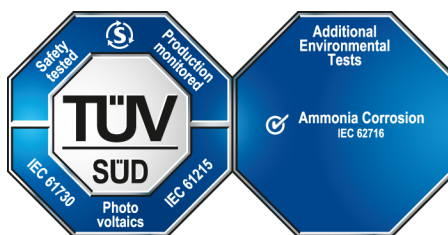

Product: **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**
Mono-Crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 701262213904-01

Valid until: 2028-03-01

Date, 2023-06-09

(Zhulin Zhang)

ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ CERTIFICADO ◆ CERTIFIKAT ◆ CERTIFICATE

CERTIFICATE

No. Z2 087093 0012 Rev. 01

Model(s):

Denim U M2B xxx BTG 144H (xxx=430-470, in step of 5);
 Denim U M2B xxx BTG 120H (xxx=360-390, in step of 5);
 Denim U M3B xxx BTG 156H (xxx=570-610, in step of 5);
 Denim U M3B xxx BTG 144H (xxx=530-560, in step of 5);
 Denim U M3B xxx BTG 132H (xxx=485-515, in step of 5);
 Denim U M3B xxx BTG 120H (xxx=440-465, in step of 5);
 Denim U M3B xxx BTG 108H (xxx=400-420, in step of 5);
 Denim U N3 xxx BTG 144H (xxx=550-585, in step of 5);
 Denim U N3 xxx BBG 144H (xxx=550-585, in step of 5);
 Denim U N3 xxx BWG 144H (xxx=550-585, in step of 5);
 Denim U N3 xxx BTG 132H (xxx=505-535, in step of 5);
 Denim U N3 xxx BBG 132H (xxx=505-535, in step of 5);
 Denim U N3 xxx BWG 132H (xxx=505-535, in step of 5);
 Denim U N3 xxx BTG 120H (xxx=460-485, in step of 5);
 Denim U N3 xxx BBG 120H (xxx=460-485, in step of 5);
 Denim U N3 xxx BWG 120H (xxx=460-485, in step of 5);
 Denim U N3 xxx BTG 108H (xxx=415-435, in step of 5);
 Denim U N3 xxx BBG 108H (xxx=415-435, in step of 5);
 Denim U N3 xxx BWG 108H (xxx=415-435, in step of 5);
 Denim U M4B xxx BTG 132H (xxx=640-670, in step of 5);
 Denim U M4B xxx BTG 120H (xxx=585-605, in step of 5);
 Denim U M4B xxx BTG 64H (xxx=310-320, in step of 5).
 xxx is standing for rated output power at STC.

Parameters:

| | |
|----------------------|--|
| Safety Class: | Class II |
| Max. system voltage: | 1500V DC |
| Construction: | Framed, with Junction box, cable and connector. |
| Fire Safety Class: | Class A according to UL790 |

Tested according to:

IEC 61215-1(ed.1)
 IEC 61215-1-1(ed.1)
 IEC 61215-2(ed.1)
 IEC 61730-1(ed.2)
 IEC 61730-2(ed.2)
 IEC 62716(ed.1)